

ClickLock Installation standing seam roofing sheets catalog

1.ClickLock standing seam metal roof system instruction:



ClipLock standing seam roof system is one kind of 360° double-folded surface supporting roofing system. The roof panel need to be locked by machine or hand, after clip locked, the standing seam roof system could be completely impervious and waterproof. Regardless of the buildings' shapes, all the roofing sheets could be locked completely, and there is not any screws on the roofing

system.It's not only could be stretching freely when the roofing system has temperature changes,but also avoid water leakage,because this roofing system doesn't need screws.Due to it's special three-dimensional arcing processing way,this standing seam roofing sheets could be installed as dome of different sizes.

Also the drain slope of Cliplock double lock roofing system is greater than or equal to 10° ,and single lock roofing system is greater than or equal to 30° ,so the drainage and waterproof performance of the whole structure is excellent.

2.Classical standing seam metal roof system types:


Double lock Type 01:

Classical Type I of the lock standing seam



Double lock Type 02:

Classical Type II of the lock standing seam

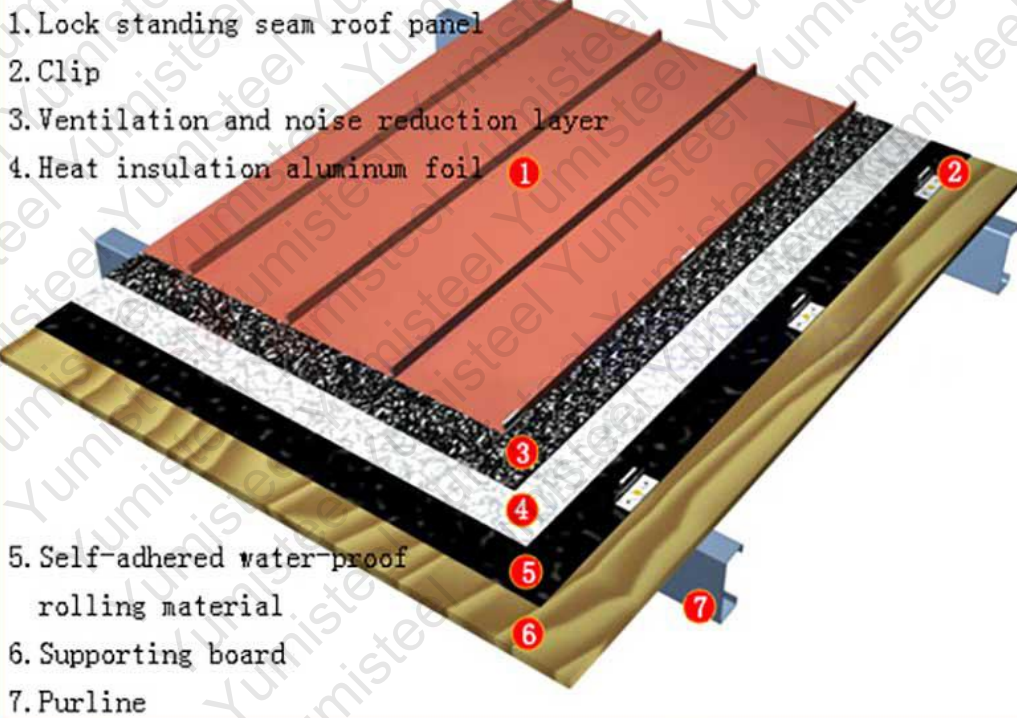

Single clip lock system:




3. Main characteristics of aluminum roofing sheets:

- ★ It's mainly used for resorts, upscale hotels, clubs, exhibition halls, residential houses, etc;
- ★ With simple structure, light, safe, smooth lines features, it makes buildings in beautiful appearance;
- ★ It has low vertical height, low loss of aluminum sheet, and low system load and strong structural stability;
- ★ It could be installed to be special geometric shapes such as curved, spherical and three-dimensional curved arcs, which could meet up the requirement of architects and users;
- ★ This roof system is installed with fixed deduction and






sliding fastener combination, which could reduce displacement caused by thermal expansion and contraction and stop aluminum roofing sheets to be deforming or cracking;

★ Color could be customized, and it's environmentally friendly and anti-corrosion material.

4. Aluminum roofing sheets joint:

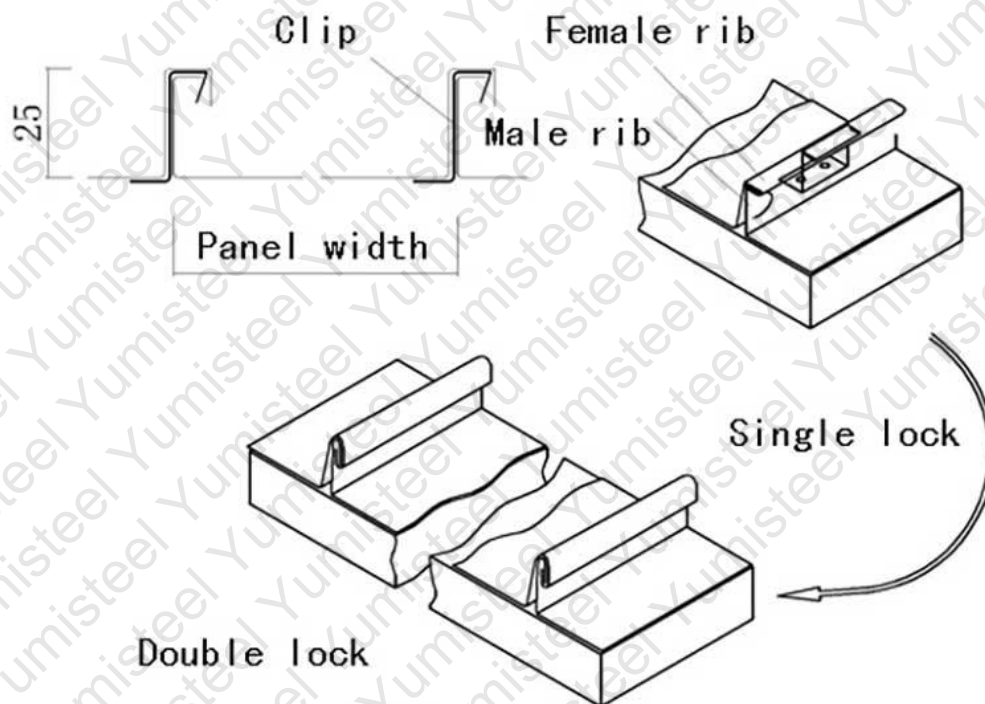

5. Metal roofing model list:

Model type	Material	Thickness(mm)
	Al-Mg-Mn alloy metal sheets	0.70 - 1.20
	Titanium zinc metal sheets	0.60 - 0.80
	Al-Mg-Mn alloy metal sheets	0.70 - 1.20
	Titanium zinc metal sheets	0.60 - 0.80
	Al-Mg-Mn alloy metal sheets	0.70 - 1.20
	Titanium zinc metal sheets	0.60 - 0.80
	Al-Mg-Mn alloy metal sheets	0.70 - 1.20
	Titanium zinc metal sheets	0.60 - 0.80
	Al-Mg-Mn alloy metal sheets	0.70 - 1.20
	Titanium zinc metal sheets	0.60 - 0.80

6. Our project cases:

Our company has supplied for many projects in our domestic market and foreign market,we have confidence that we could solve your doubt and work together finally.



Resort

Stores


Hotel

Gazebo

7. Our services & support:

→ Inquiry notes:

It's better to have your hand drawings for your roof systems, then our engineers could follow your drawings to calculate the standing seam roofing sheets quantities.

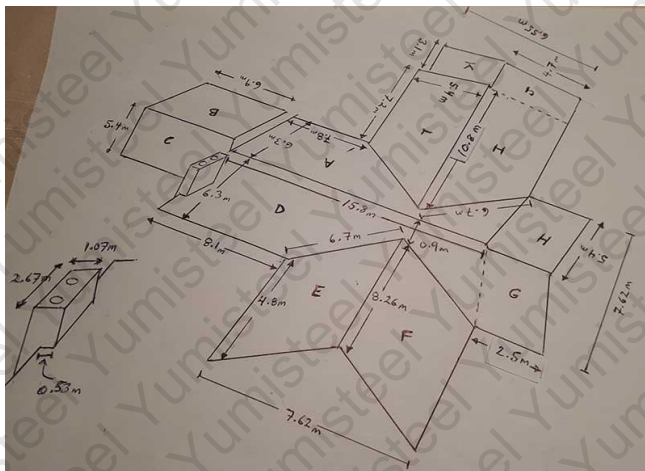


→ Sales quotation:


With the hand drawings and specifications of products, our sales could quote as per the rough quantities, to offer one rough budget for customers. Also there will be technical support during the quotation, if customers have any doubt about standing seam roofing system.

→ Engineer design:

Once price confirmed, then hand drawings will be passed to engineers. After engineers' calculation, we will have the drawings and material list for your confirmation, which will also include flashing list.

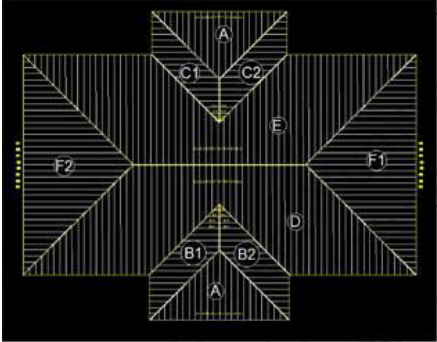

板型 Roof panel	编号 Item No	长度 (ft/inch)	长度 (mm)	数量 Pcs	小计 Total (m)	区域 (Section)
1 25-430 Alum roofing sheet	A-1	21'-4"	6490	4	25.96	A
	A-2	19'-6"	5950	4	23.80	
	A-3	17'-9"	5420	4	21.68	
	A-4	16'	4880	4	19.52	
	A-5	14'-3"	4340	4	17.36	
	A-6	12'-6"	3800	4	15.20	
	A-7	10'-9"	3270	4	13.08	
	A-8	9'	2730	4	10.92	
	A-9	7'-2"	2190	4	8.76	
	A-10	5'-5"	1660	4	6.64	
	A-11	3'-8"	1120	4	4.48	
合计 sub-total				44	167.40	
2 25-430 Alum roofing	B-1	3'-4"	1020	2	2.04	B (including B1 B2)
	B-2	4'-9"	1450	2	2.90	
	B-3	5'-2"	1880	2	3.76	
	B-4	7'-7"	2310	2	4.62	
	B-5	9'	2740	2	5.48	
	B-6	10'-5"	3180	2	6.36	
	B-7	11'-10"	3600	2	7.20	
	B-8	13'-2"	4020	10	40.20	
	B-9	12'-3"	3740	2	7.48	



→ Customers' confirmation:

Our sales man will follow the drawing and material list confirmation, and confirm one by one with patience, until all the things related to aluminum system are clear to customers.

→ Production:

Our sales man will follow up the production as per orders, and update to customers. The common lead time is 7-10 days, when it's regular color, and we have stock Al-Mg-Mn alloy metal coils. If it's special customized, then

the lead time would be 20-25days.

→**Shipment:**

Once production done,our sales team will show customers with product pictures,and inform the shipping timeline and apply for balance payment.And they will update step by step during the shipment.

→**After-sales service:**

After customers receive the goods,if any problem about product quality,quantities,and installation doubt,warmly welcome you to contact with our sales man,they will be at your service.

→**Contact details:**

E-mail:admin@yumisteel.com / manager@yumisteel.com;

Company Tel:+86-592-6095031

Or you could follow up by Company wechat:

